


FELUCA kitchen stool  
5011-KSTW  
Design BrogliatoTraverso

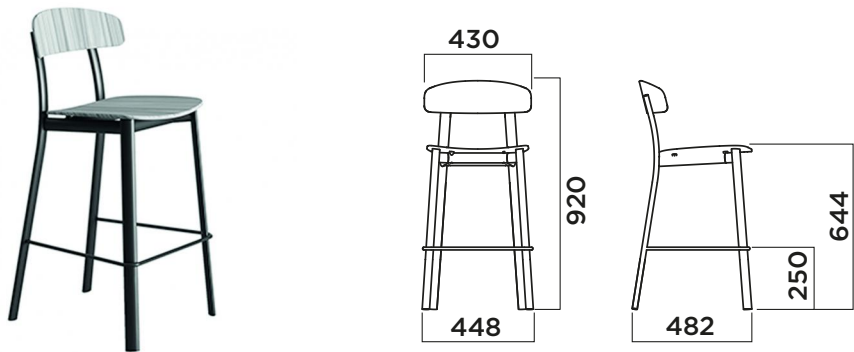

FRAME

TELAIO  
BASTIDOR

Metal frame in oval tube 40x20 mm, thickness 1,5 mm, accordingly with UNI EN 10305-3 rule  
Metal frame in oval tube 40x20 mm, thickness 1,5 mm, accordingly with UNI EN 10305-3 rule  
Metal frame in oval tube 40x20 mm, thickness 1,5 mm, accordingly with UNI EN 10305-3 rule

|    |       |    |    |       |       |
|----|-------|----|----|-------|-------|
|    |       |    |    |       |       |
| 20 | 9004F | 79 | 78 | 6013F | 7006F |

SEAT AND BACKREST

SEDUTA E SCHIENALE  
ASIENTO Y RESPALDO

Plywood ash, 10,5 mm thickness  
Plywood ash, 10,5 mm thickness  
Plywood ash, 10,5 mm thickness

|       |        |
|-------|--------|
|       |        |
| FRVAN | FRTA04 |

FINISHING

FINITURA  
ACABADO

Painted frame with epoxy-polyester powder with average thickness of 50  $\mu$   
Telaio verniciato con polveri epossipoliesteri spessore medio di 50  $\mu$   
Bastidor con recubrimiento en polvo epoxipoliéster con 50  $\mu$  de espesor medio.

FEET

PIEDINI  
PIES DE APOYO

Polypropylene  
Polipropilene  
Polipropileno

UPHOLSTERY

TAPPEZZERIA  
TAPIZADOS

Request information from the sales department

PKG

IMBALLO  
EMBALAJE

| Pkg | A(cm) | B(cm) | h(cm) | MC   | PCS | Weight (kg) |
|-----|-------|-------|-------|------|-----|-------------|
|     | 52.5  | 57    | 96.5  | 0.29 | 1   | 9.5         |